



Hanrun paper®

EVO-A450 DTF PRINTER

www.hanrunpaper.com info@hanrunpaper.com

5/7 Color System



Accommodate more different image sizes

White Ink Filtration
Circulation System

Print head
installation-free

Less powder
addition frequency

In the process of continuous market research, we found that many customers have higher printing requirements, but due to limited space, 600mm machines will occupy too much space, so we launched the new EVO A-450 dtf printer to meet the requirements of such customers. It can accommodate more different image sizes than A3 printers.

KEY FEATURES

- ◆ The printed color transition is more natural and more gorgeous
- ◆ Printheads installation free
- ◆ Electric pinch roller control system
- ◆ Accommodate more different image sizes
- ◆ White Ink Filtration & Circulation System
- ◆ Less powder addition frequency




5/7 color system

We have designed a 5/7-color system for this machine, and the printed color transition is more natural and the color is more gorgeous.

THK silent guide


A2 Format dtf printing, suitable for 12.99"-16.54" pattern size, High quality THK guides to ensure stable and quiet printing. These guides provide smooth operation and long life, making them ideal for high-end machines.

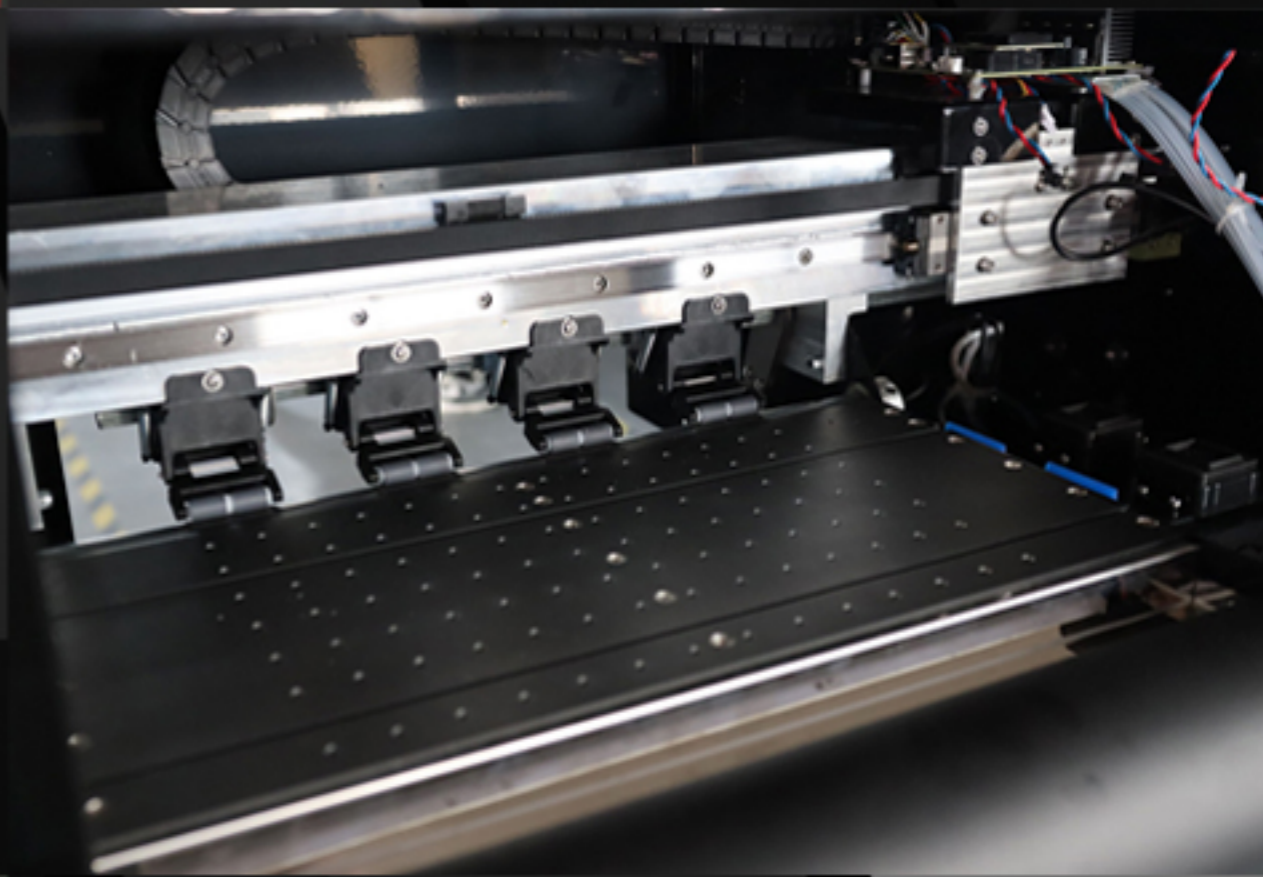

Enhanced Ink Monitoring Feature

Add a display screen next to the emergency stop button to show the remaining ink levels, making it easy and convenient to monitor ink status at a glance.



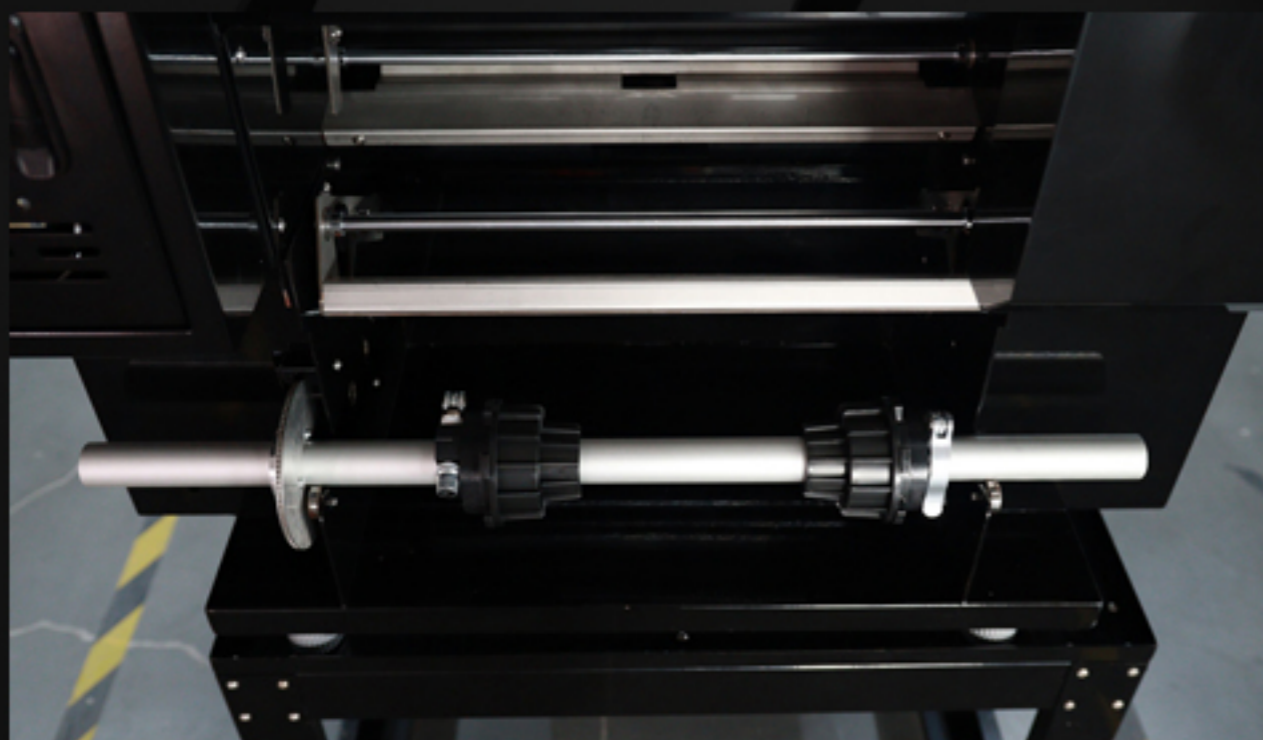

Tension control system

Tension control system automatically controls tension during DTF film printing processes.

Work indicator tricolor light

This machine is equipped with work indicator three-color lights, different colors represent different working states, red light indicates machine failure, yellow light indicates power not printed, green light indicates power printing, convenient and intuitive understanding of the printer status.



Air switch

Powder shaker equipped with air switch, more safe and reliable.

EVO A450 DTF PRINTER

Model	EVO-A450	
Printhead	2 XP600	2 I3200
Print speed	8pass(720*720dpi): 4.5m ² /h	4pass(360*2400dpi): 10m ² /h 6pass(360*3600dpi): 7m ² /h 8pass(720*2400dpi): 5m ² /h
Ink	DTF pigment ink (CMYK+W+LC+LM)	DTF pigment ink (CMYK+W)
Three heating sections	Preheater; Print bed heater; rear heater	
Printing media width	DTF film 450mm	
RIP software	Cadlink\Flexiprint\Maintop	
Language	English	
Working environment	Temperature: 20-35°C, Humidity:35%-65%	
Power	350W	
Printer size	1314(L)*622(W)*664(H)mm	
Packing size	1370(L)*720(W)*830(H)mm	
Packing Weight	G.W 115kg	
Functional item	Shake powder control/Powder amount control /Temperature control	
Voltage	AC110V / 220V 50HZ/60HZ	

B450 POWDER SHAKER

Rewind Function	Automatic induction winding
Heating & Drying Function	The upper and lower double rows of high- efficiency heating lamps, drying, cold air fan function
Packing Size/ Weight	1440(L)*880(W)*850(H)mm GW:161kg
Powder Shaker Size	1345(L)*795(W)*680(H)mm
Electrical Parameters	Rated Voltage: 220v Rated power: 2kw Power consumption: 1kw-1.5kw